
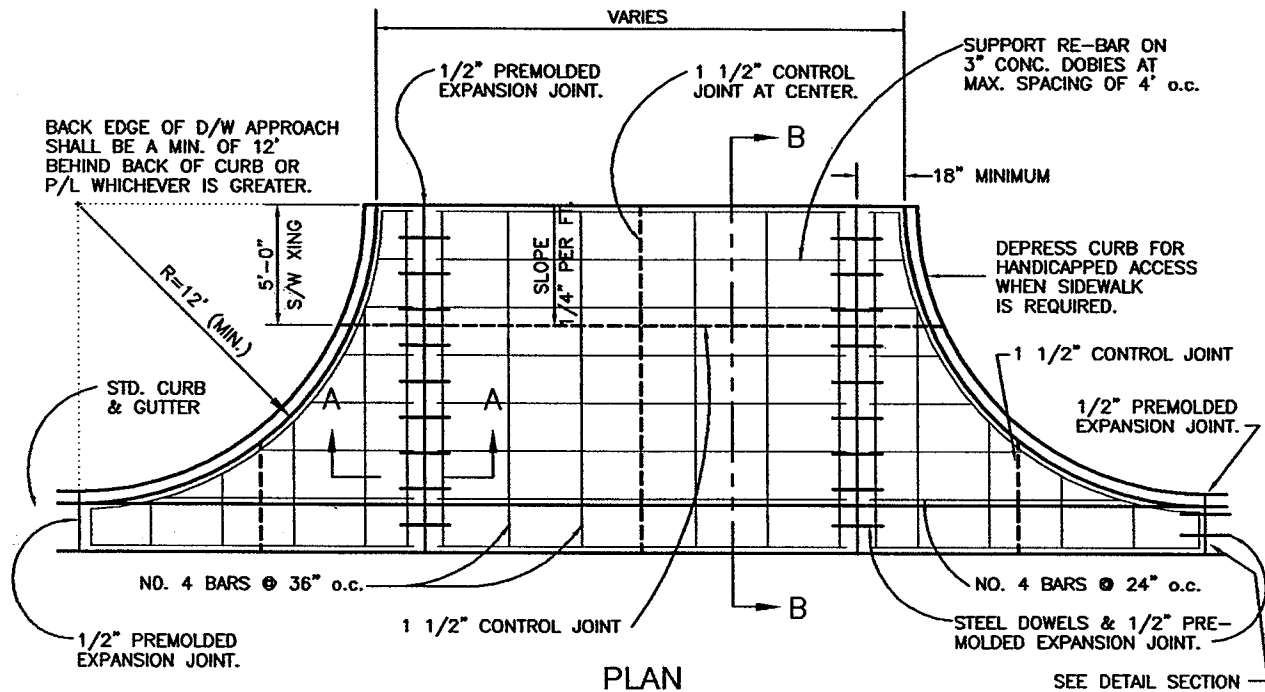



SECTION A-A



DETAIL SECTION

NOTE:

S/W XING MAY BE MOVED NO CLOSER THAN 7'-0" BEHIND F.L.

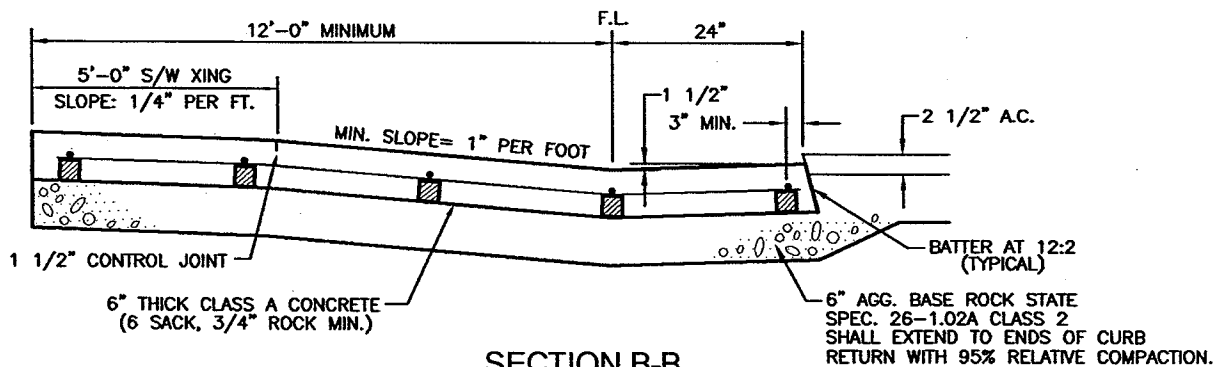

NOTE: MULTI FAMILY UNITS SHALL ALSO USE THIS APPROACH.

WHERE A NEW DRIVEWAY IS BEING INSTALLED IN EXISTING CURB, USE EPOXYED DOWELS OR SEE DETAIL SECTION FOR ALTERNATE INSTALLATION.

ENGINEERING DEPARTMENT

CITY OF MERCED, CA.

COMMERCIAL/INDUSTRIAL DRIVEWAY

DRAWN: KGE

APPROVED BY:

DATE

ENG.

DATE 1/02

CITY ENGINEER

D-7

SHEET

OF