




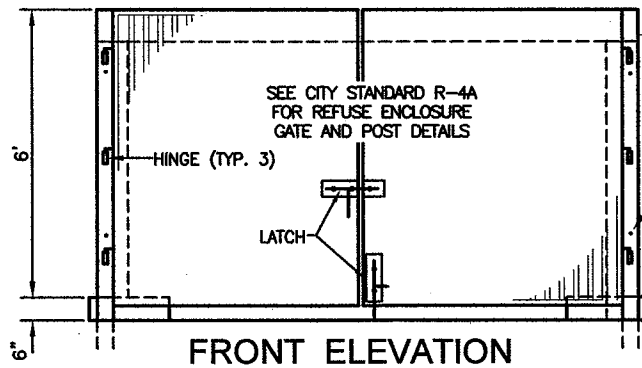

FRONT ELEVATION

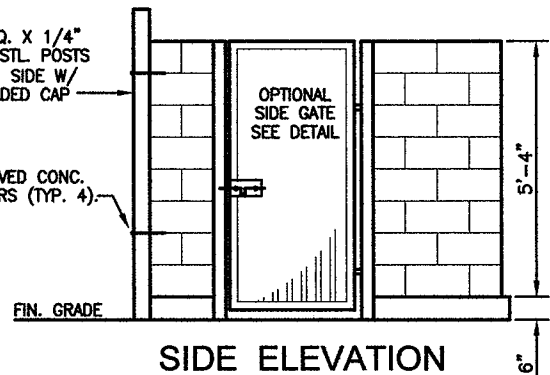


SIDE ELEVATION

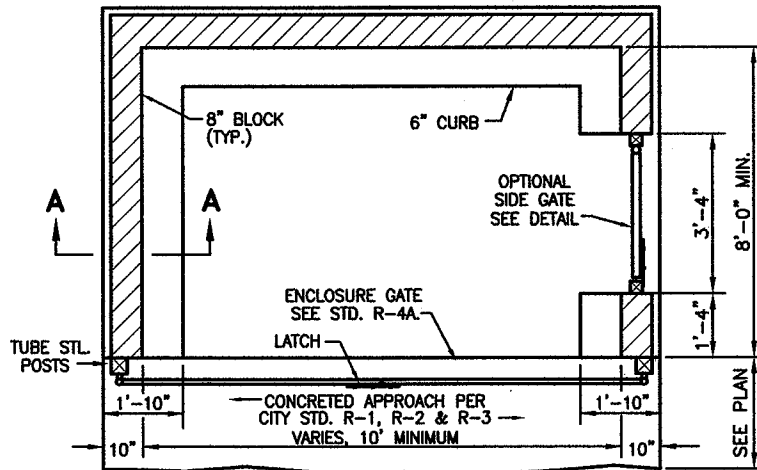

PLAN

NOTE:


1. GATES, HINGES, ETC., SHALL NOT ENCROACH INTO THE LOADING ENVELOPE. GATE SHALL HAVE A MINIMUM 110" TRAVEL.
2. REFUSE ENCLOSURE SHALL HAVE A 10-FOOT MINIMUM OPENING. NO GATE HARDWARE SHALL EXTEND INTO THE ENCLOSURE OPENING.
3. ENCLOSURE SHALL BE USED FOR REFUSE COLLECTION ONLY. ENCLOSURE SHALL NOT BE USED FOR STORAGE.
4. EACH SWING GATE SHALL HAVE A SWING DOWN DOOR STOP ATTACHED AT THE BOTTOM.
5. EACH GATE SHALL HAVE A STURDY AND SECURE LATCH TO SECURE GATES IN BOTH THE OPEN AND CLOSED POSITIONS.
6. REFUSE DIVISION WILL CONDUCT ONSITE INSPECTION OF ENCLOSURE FORMS PRIOR TO CONCRETE BEING POURED.

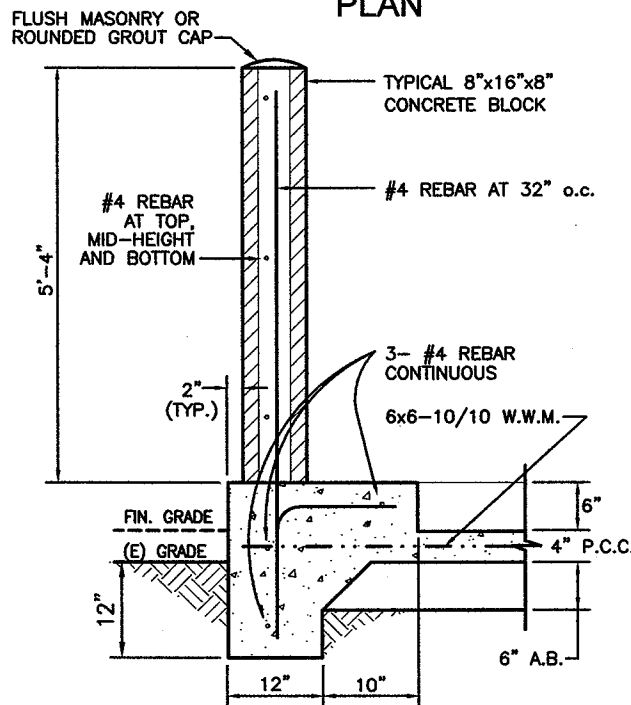

SECTION A-A

TYPICAL REFUSE ENCLOSURE- WALL DETAIL

NOT TO SCALE

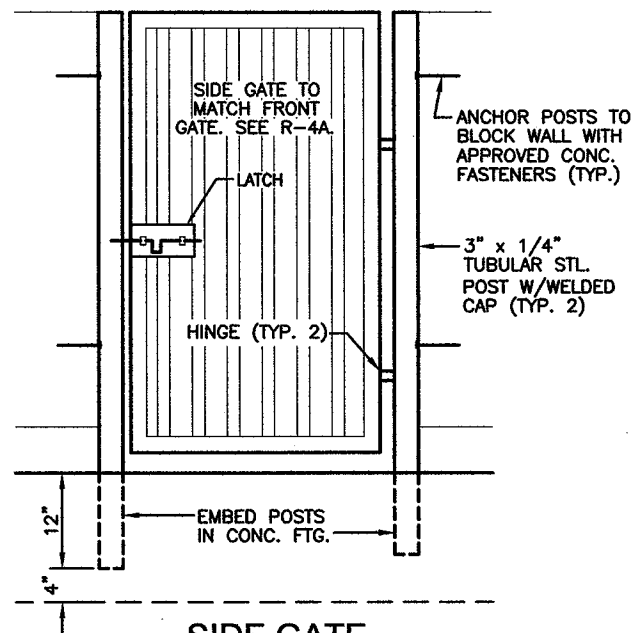

SIDE GATE

SIDE GATE SHALL BE OPTIONAL UNLESS REQ'D. BY CITY ENGINEER.

ENGINEERING DEPARTMENT

CITY OF MERCED, CA.

REFUSE ENCLOSURE DETAIL

DRAWN: KGE
DATE: 11/01
REVISED: 8/04

APPROVED BY: *David L. Tucker*
CITY ENGINEER

DATE: 4/4/06

R-4

SHEET

OF