



PERMANENT ABANDONMENT — LATERAL CAP AT MAIN

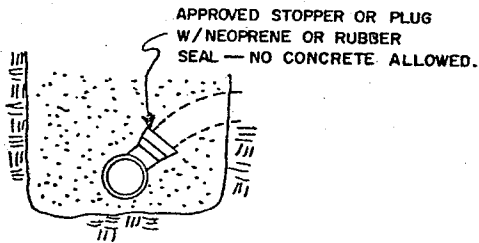

1. IF LATERAL IS ORANGBURG MATERIAL OR IS IN POOR CONDITION, SADDLE OR CAP MUST BE INSTALLED AT MAIN.
2. IF LATERAL MATERIAL IS CAST IRON OR VCP WITH NEOPRENE SEALS, THE CAP MAY BE INSTALLED AT PROPERTY LINE.

TEMPORARY ABANDONMENT — LATERAL CAP AT PROPERTY LINE

APPROVED PLUG W/NEOPRENE OR RUBBER SEAL — NO CONCRETE ALLOWED.

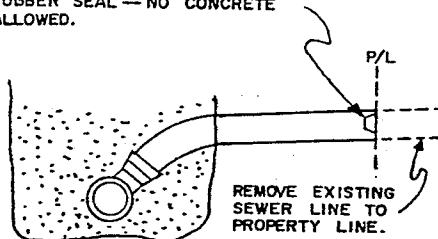

1. CAP AT PROPERTY LINE WILL BE ALLOWED IF THE LATERAL IS IN GOOD CONDITION AND IF IT WILL BE USED IN IMMEDIATE FUTURE ON AN ACTIVE PROJECT.
2. SKETCH OF CAPPED LATERAL WITH MEASUREMENTS FROM STREET CENTERLINE AND FROM NEAREST MANHOLE SHALL BE PROVIDED TO ENGINEERING DEPARTMENT.
3. NOTES 1 & 2 FOR PERMANENT ABANDONMENTS APPLY TO TEMPORARY CAPS ALSO.

ENGINEERING DEPARTMENT		CITY OF MERCED, CALIF	
SEWER LATERAL ABANDONMENT			S - 14
DRAWN: <i>ms</i>	APPROVED BY: <i>[Signature]</i>	DATE: <i>6-19-84</i>	
ENG.	CITY ENGINEER		
REVISED			
			SHEET OF